

# Pipe Collars



Flexible Seals	1
Rigid Box Seals	2
Hard Seals	4
Glazing Systems	5
Strip	6
Special Extrusions	7
Pipe Collars	8
Pipe Wraps	10
Linear Gap Seal	11
Silicone Sealant	12
Acrylic Sealant	13
Expanding Foam	14
Fire Bags	15
Fire Barrier	16
Intumescent Sheet	17
Electrical Box Fire Pads	17
Smoke/Draught Seals	18
Bottom of Door Seals	19

Pyroplex® Pipe Collars seal closed flammable pipes from 25mm to 400mm diameter and can be face fixed or set-in to a wall or ceiling structure - the most economic long term solution.

**Suitable for fitting to:**


Concrete, masonry, porous concrete and stud wall constructions.

Concrete floor construction - on underside only.

Waste water and fresh water plastic pipes.

Open pipe application details available on request.

**Examples of Collar Locations**

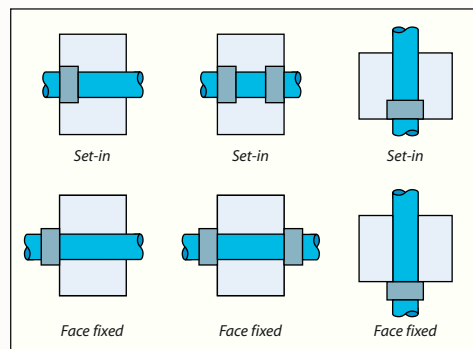

**Features**

Fire rating up to 4 hours.

Pyroplex® Intumescent is totally unaffected by water.

Pyroplex® Intumescent is robust - 'non-flaking' and difficult to tear.

Stainless steel case.

Tab closing - easy to fix in place.

Identification on each product for full traceability.

**Recommendations For Surface Mounting Installation**

1. Ensure substrate around pipe is flat and free from obstructions.
2. Release retaining pin and position Pipe Collar around pipe.
3. Slide tab through slot in Pipe Collar and fold back 180° to secure.
4. Secure Pipe Collar by using 50mm x 8mm masonry screws or 50mm minimum expanding metallic bolts. If in doubt refer to supplier.

*N.B: Do not use fixings which rely on plastic components for grip.*



**Please note:** Movable lugs under development